

HSF



RoHS

SPECIFICATION

Current Rating: 1.0Amp
 Insulation Resistance: 1000MΩ min
 Contact Resistance: 20mΩ max
 Withstand Voltage: 500V AC/DC
 Operating Temperature: -40° C to +105° C
 Contact Material: Brass
 Contact Plating: Au or Sn Over Ni
 Insulator Material: PBT+30%GF UL 94V-0

Ordering Code:

FDAS01 - X - X - X - X - X
 ① ② ③ ④ ⑤ ⑥

① Series No:

② No. of Contacts

10 14 16
 18 20 24
 26 30 34
 40 44 50
 60 80

④ Color Insulator

B:Black
 G:Grey

⑤ Packing




A:Tray
 B:Bag
 C:Tube
 D:Tape Reel

③ Contact Plating

G0: Gold flash S0: Gold flash/Ni
 G1: 3u" Gold S1: 3u" Gold/Ni
 G2: 5u" Gold S2: 5u" Gold/Ni
 G3: 10u" Gold S3: 10u" Gold/Ni
 G4: 15u" Gold S4: 15u" Gold/Ni
 G5: 30u" Gold S5: 30u" Gold/Ni
 SN: Tin


⑥

A:Type1
 B:Type2

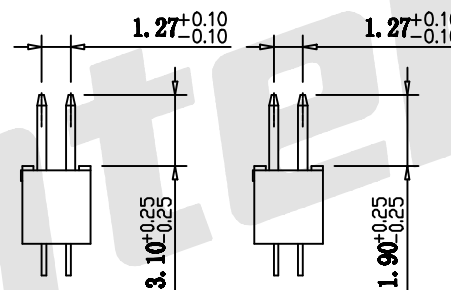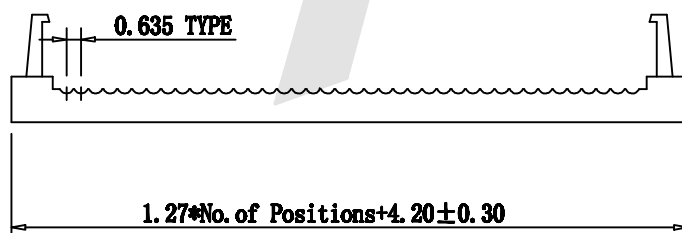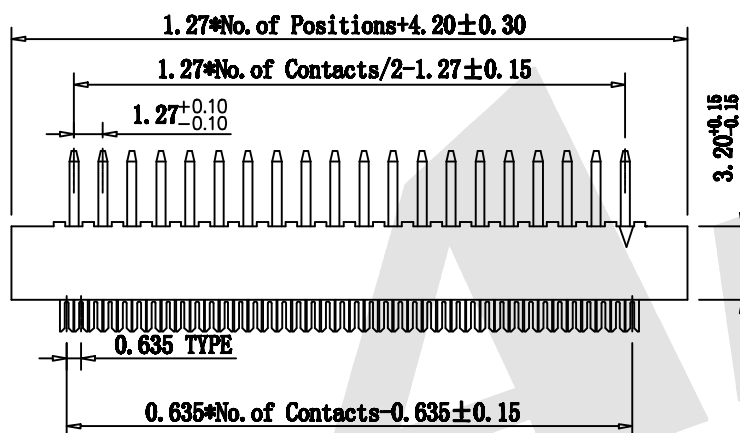

A:Type1

B:Type2



Unless Otherwise specified tolerance
 I. ±0.35 I.XI:±0.20
 I.X:±0.25 I.XII:±0.15

SCALE:
 As Shown UNIT:
 mm
 DRAW
 Gong Feng DATE
 08/11/2017
 CHECK
 BobYang DATE
 08/11/2017



Antenk® ANTENK ELECTRONICS CO., LTD
 Http://www.antenk.com
 E-mail:sales@antenk.com

TITLE:
 1.27mm DIP Plug Connector
 (Terminated Height 5.1)

DRAWING NO: FDAS01-XXXXX

PRODUCT NO: FDAS01-XXXXX

REV

DESCRIPTION

DATE

1

2

3

4

5

6

7

8