

HSF







SPECIFICATION

Current Rating:	3.0 Amp
Insulation Resistance:	1000M ohms min
Contact Resistance:	20M ohms max
Dielectric Withstanding:	AC500V
Operating Temperature:	-65°C to +125°C
Contact Material:	Brass
Insulator Material:	PBT,UL 94V-0 Black

Ordering Code:

FHER03 - X - X - S - X - X - X
① ② ③ ④ ⑤ ⑥ ⑦

- ① Series No:
② No. of Contacts
01 To 40
③ Contact Plating:
G0: Gold flash S0: Selective
G1: 3U" Gold S1: Selective 3u"
G2: 5u" Gold S2: Selective 5u"
G3: 10u" Gold S3: Selective 10u"
G4: 15u" Gold S4: Selective 15u"
G5: 30u" Gold S5: Selective 30u"
SN: Tin
④ Connector Type
S: Single
⑤ Plastic High:
H: 8.5
Please mark the desired length in the H
- ⑥ Insulator Material
A: PBT
B: PA6T
C: LCP
D: PA46
E: PA9T
⑦ Packing
A: Tray
B: Bag
T: Tube
U: Tube+CAP
R: Tape&Reel
W: Tape&Reel+CAP

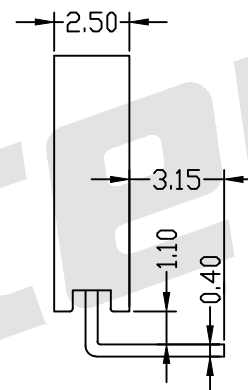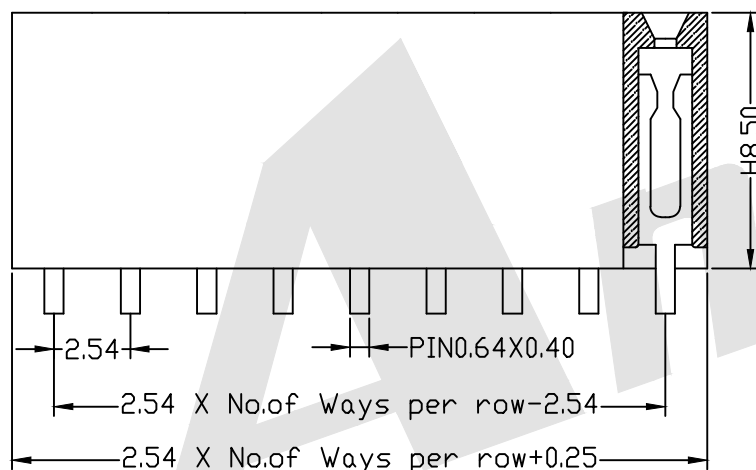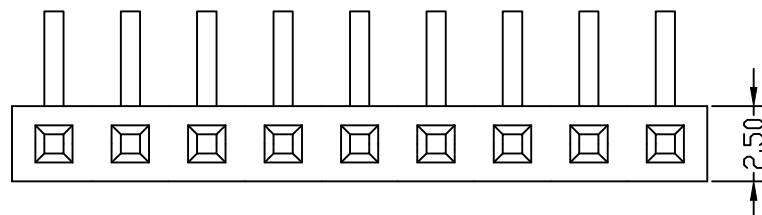

PCB LAYOUT

Unless Otherwise specified tolerance
X. ±0.35 X.XX: ±0.20
X.X: ±0.25 X.XXX: ±0.15

SCALE:
As ShownUNIT:
mmDRAW
YG ZHONGDATE
01/05/2016CHECK
BobYangDATE
01/05/2016

3rd ANGLE PROJECTION



ANTENK ELECTRONICS CO., LTD
Http://www.antenk.com
E-mail: sales@antenk.com

TITLE:

2.54mm Female Header Single Row Angle Type H:8.5

DRAWING NO:

FHER03-XXSXXX

PRODUCT NO:

FHER03-XXSXXX

REV

DESCRIPTION

DATE