




L Type



S Type

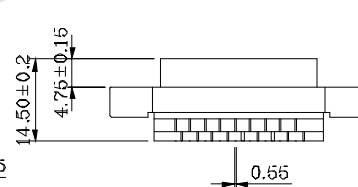

MATERIALS:(RoHS Compliant)

Housing And Cover: Plastic Thermoplastic
P.B.T UL94V-0 Black
Contacts: Phosphor Bronze Gold
Selective Plated
Bracket: Zinc Alloy Nickel
Plated Over Copper

ELECTRICAL CHARACTERISTICS:

Contact Current Rating: 1 Amp
Dielectric Withstanding Voltage: 500V AC
Insulation Resistance: >500MΩ/Min
Contact Resistance: 35mΩ/Max
Operation Temperature: -55°C ~ +105°C

Ordering Code:

HPCNS - 36 - F - L - 3 - 1
① ② ③ ④ ⑤ ⑥

① Series No:

② Contact NO. :
36=36P

③ Contact Type:
F:Female


④ BRACKET FINISHES:
L=Latch Bracket
S=Screw Bracket

⑤ THREADED FINISHES:
1: #2-56
2: #4-40
3: M2.6

⑥ Contact Plating:
1: 5u" Gold Selective Plating
3:15u" Gold Selective Plating
5:30u" Gold Selective Plating

Unless Otherwise specified tolerance
X. ±0.35 X.XX: ±0.20
X.X: ±0.25 X.XXX: ±0.15

SCALE:
As Shown UNIT:
mm
DRAW
Jack Bao DATE
9/25/2018
CHECK
Bob Yang DATE
9/25/2018



Antenk® ANTENK ELECTRONICS CO.,LTD
Http://www.antenk.com
E-mail:sales@antenk.com

TITLE:1.27mm Series 36P Cable Receptacle Connector
Solder Molded Ribbon Type

DRAWING NO:HPCNS-36FL31

PRODUCT NO:HPCNS-36FL31

REV

DESCRIPTION

DATE