


HSF




RoHS

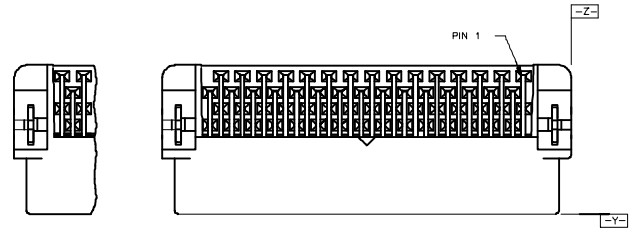

FOR 26, 30, 50 POSITIONS ONLY

FOR 20, 40, 60, 68, 80, 100, 120 POSITIONS ONLY

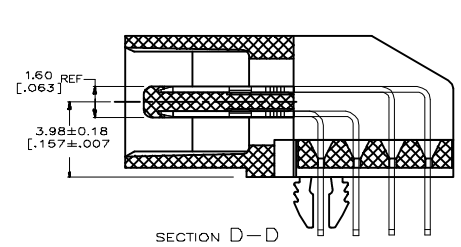

SECTION D-D SCALE 2:1

SPECIFICATIONS:

1. Electrical Characteristics:
  - 1.1 Contact Current Rate: 1AMP
  - 1.2 Insulation Resistance: 500MΩ Minimum
  - 1.3 Contact Resistance: 35MΩ Maximum
  - 1.4 Dielectric Voltage: 500V AC For One Minute
2. Material:
  - 2.1 Insulator: LCP+30%G/F, Color: black
  - 2.2 Contact: Phosphor bronze
3. Environment:
 




Operation Temperature: -40° C To +105° C

No. of Pin	Dimensions					
	A	B	C	G	J	H
20	19.77	18.83	22.63	10	20	11
26	23.58	22.64	26.44	13	26	14
30	26.12	25.18	28.98	15	30	16
40	32.47	31.53	35.33	20	40	21
50	36.82	37.88	41.68	25	50	26
60	45.17	44.23	48.03	30	60	31
68	50.25	49.31	53.11	34	68	35
80	57.87	56.93	60.73	40	80	41
100	70.57	69.63	73.43	50	100	51
120	83.27	82.33	86.13	20	120	61

Ordering Code:

HPZTR - M - X - X - X  
 ① ② ③ ④ ⑤

- ① Series No:  
1.27mm Right-Angle Full Plastic Type
- ② Contact Type:  
M: Male
- ③ Contact No.:  
20=20P 26=26P 30=30P  
40=40P 50=50P 60=60P 68=68P  
80=80P 100=100P 120=120P
- ④ Contact Plating  
S0: Gold Flash Selective Plating  
S1: 3u" Gold selective plating  
S2: 5u" Gold Selective Plating  
S4: 15u" Gold Selective Plating  
S5: 30u" Gold Selective Plating
- ⑤ PCB LAYOUT OPTION  
A: A TYPE B: B TYPE

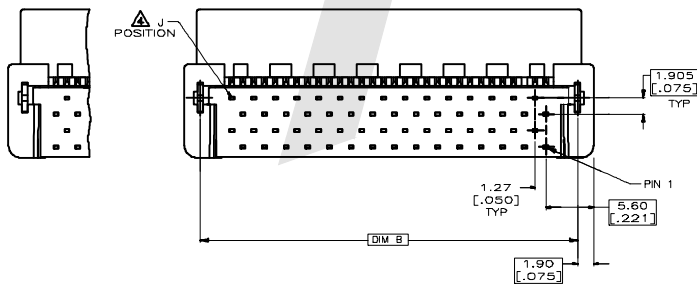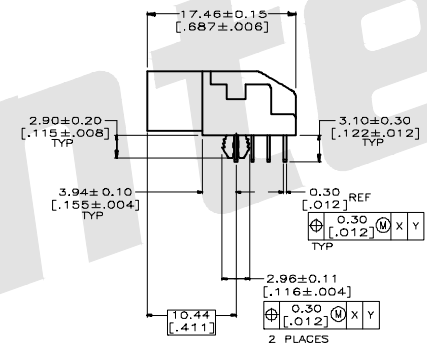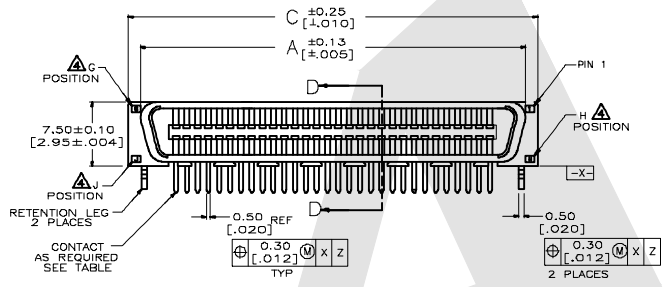

BOTTOM VIEW A TYPE

BOTTOM VIEW B TYPE

Unless Otherwise specified tolerance  
 X. ±0.35 X.XX: ±0.20  
 X.X: ±0.25 X.XXX: ±0.15



ANTENK ELECTRONICS CO., LTD  
 Http://www.antenk.com  
 E-mail:sales@antenk.com

SCALE: As Shown UNIT: mm  
 DRAW Jack Bao DATE 9/18/2018  
 CHECK Bob Yang DATE 9/18/2018

TITLE: 1.27mm Series Plug Right-Angle Full Plastic Type



DRAWING NO: HPZTR-MXXX  
 PRODUCT NO: HPZTR-MXXX

REV	REVISION DESCRIPTION	DATE