

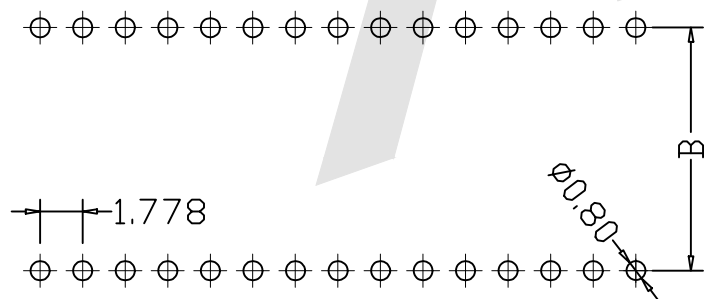
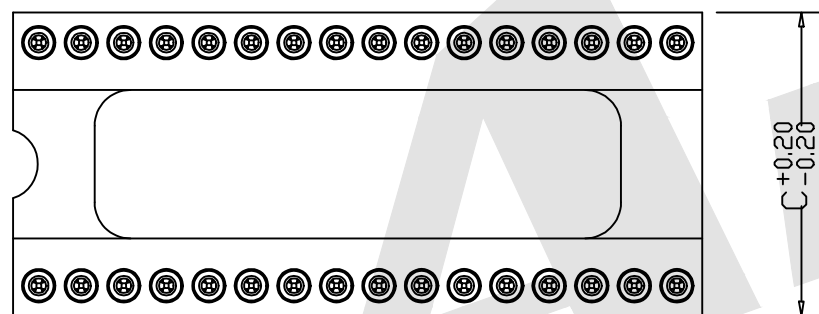


HSF

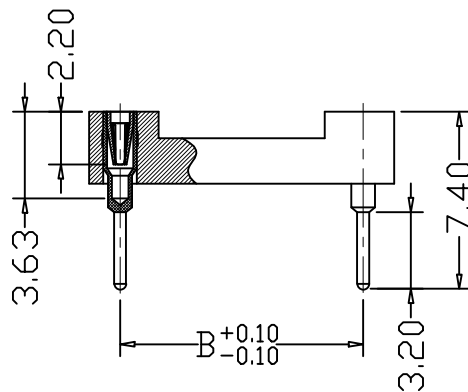

ROHS

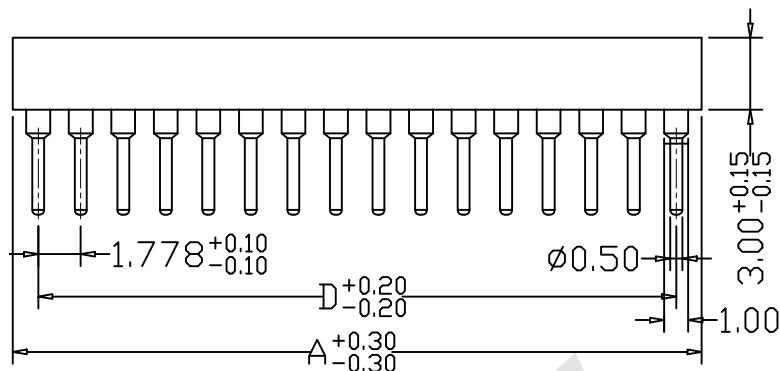

Recommended P.C.B Layout (Top Side)
(PCB BOARD TOLERANCE ± 0.05)

Dimension & Ordering Information

Type	NO. of Poles	Dimension			
		A	B	C	D
A1	24	21.80	10.16	12.70	19.558
A2	28	25.20	10.16	12.70	23.114
A3	30	27.00	10.16	12.70	24.892
A4	32	28.80	10.16	12.70	26.670
A5	48	43.10	10.16	12.70	40.894
A6	20	18.10	15.24	17.64	16.002
A7	24	21.70	15.24	17.64	19.558
A8	28	25.20	15.24	17.64	23.114
A9	40	35.80	15.24	17.64	33.782
A10	42	37.70	15.24	17.64	35.560
A11	48	43.10	15.24	17.64	40.894
A12	52	46.70	15.24	17.64	44.450
A13	56	50.20	15.24	17.64	48.006
A14	64	57.30	15.24	17.64	55.118
A15	68	60.90	15.24	17.64	58.674
A16	64	57.30	19.05	21.45	55.118

TECHNICAL SPECS:

Current Rating:	1.0Amp
Contact Resistance:	10MΩ max
Dielectric Strength:	Min 1000 V RMS
Mechanical Life:	Min 100 cycles Operating
Temperature:	-40° C to +105° C
Sleeve:	Brass CuZn36Pb3 (C36000)
Contact Clip(4 finger):	BeCu(C17200)
Contact Plating:	Au or Sn Over Ni
Insulator Material:	PPS+30%GF UL 94V-0

Ordering Code:

MIFHS01 - $\frac{X}{1}$ - $\frac{X}{2}$ - $\frac{X}{3}$ - $\frac{X}{4}$ - $\frac{X}{5}$

① Series No:

② Type selection
A1 A2 A3
A4...


③ Pin Plating
S1: Tin 150"
S2: Tin 200"
G0: Gold flash
G1: 3u" Gold
G2: 5u" Gold
G3: 10u" Gold
G4: 15u" Gold
G5: 30u" Gold

④ Clip Plating
S1: Tin 150"
S1: Tin 200"
G0: Gold flash
G1: 3u" Gold
G2: 5u" Gold
G3: 10u" Gold
G4: 15u" Gold
G5: 30u" Gold

⑤ Packing
A: Tray
B: Bag
C: Tube
D: Tape Reel

Unless Otherwise specified tolerance
X. ± 0.35 X.XX: ± 0.20
X.X: ± 0.25 X.XXX: ± 0.15

SCALE: As Shown UNIT: mm
DRAW Mo Guo Xuan DATE 16/10/2018
CHECK BobYang DATE 16/10/2018



ANTENK ELECTRONICS CO., LTD
Http://www.antenk.com
E-mail: sales@antenk.com

TITLE:

1.778mm Dual-in-line Socket
Straight DIP

DRAWING NO:

MIFHS01-XXXX

PRODUCT NO:

MIFHS01-XXXX

Change of order number

18-10-15

DESCRIPTION

DATE